



INDUSTRIAL BATTERY - VRLA-AGM BATTERY - SMALL SERIES


MODEL: EG7.5-12



Container Color
 ■ Black C
 ■ Grey 3 C

Plane Chart:


Unit:(mm) Terminal type:(F2)

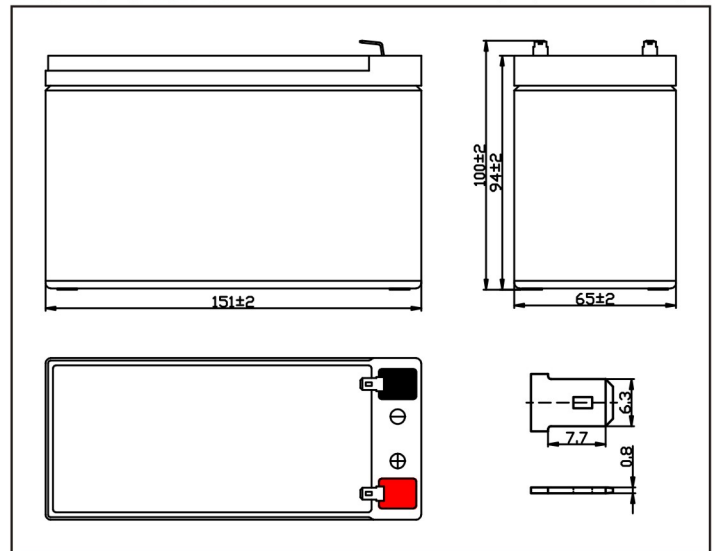


Parameter Chart:

Volts		12V	
Capacity(25°C)	20 hours rate (0.375A)	7.5Ah	
Discharge Current Testing (25°C)	20 I ₂₀ rate (7.5A,27min)	37min	
	60 I ₂₀ rate (22.5A,7min)	8min	
Internal Resistance	Full Charged Battery 25°C	24mΩ	
Design Life(25°C)	6 years		
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 2.25A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		2.19Kg	

Residual Capacity

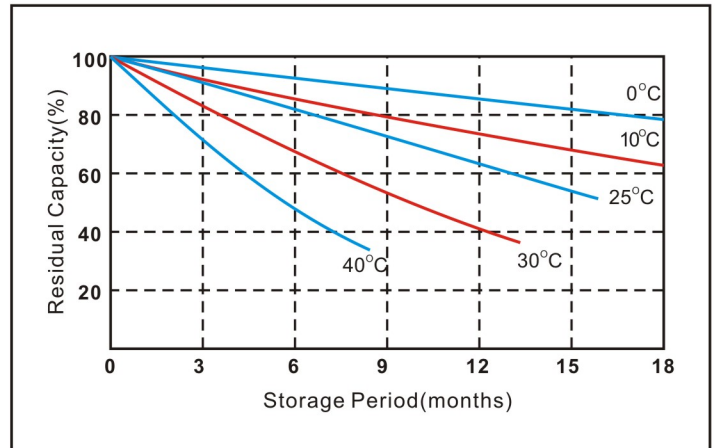

Discharge Current 25°C

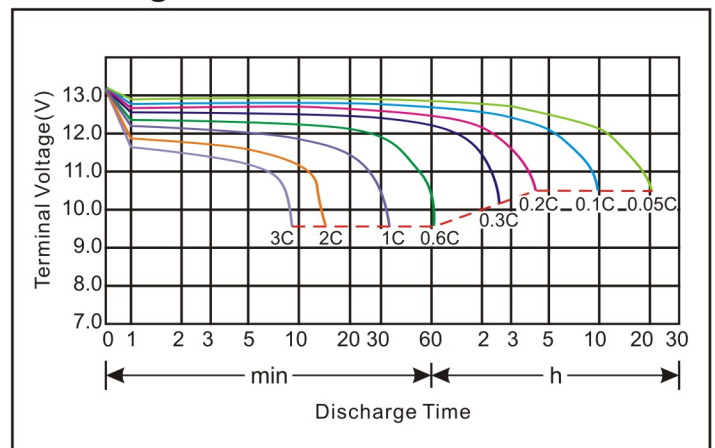


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.




MODEL: EG7.5-12

Constant voltage charging characteristics

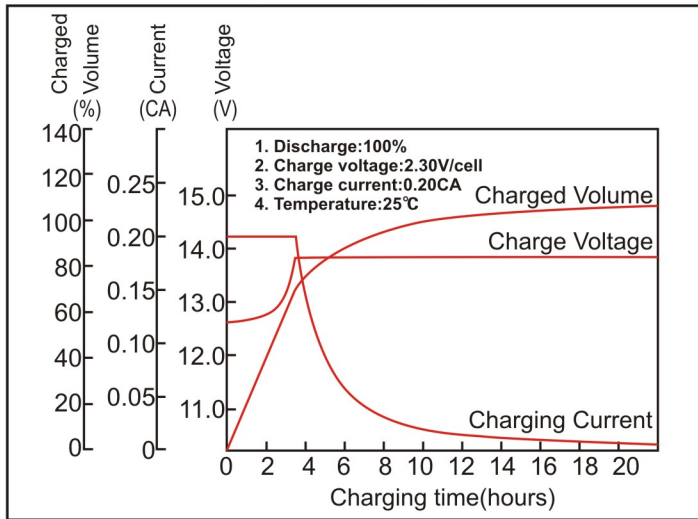

Float Life

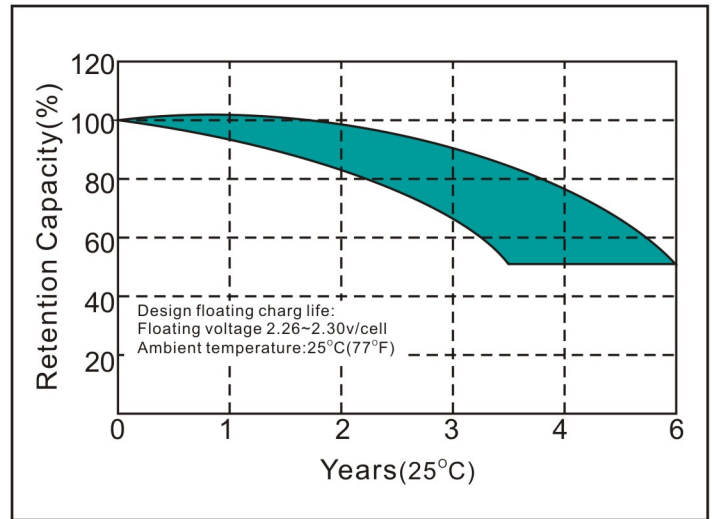

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	27.54	18.36	14.28	8.16	4.79	2.54	1.76	1.17	0.81	0.72	0.39
10.2V	26.21	17.44	13.67	7.81	4.64	2.47	1.73	1.15	0.80	0.71	0.38
10.5V	25.45	16.93	13.31	7.61	4.54	2.45	1.71	1.14	0.79	0.70	0.38
10.8V	24.68	16.42	12.95	7.41	4.44	2.42	1.68	1.12	0.78	0.69	0.37

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	307.02	207.06	163.20	93.53	55.49	29.63	21.01	14.08	9.56	8.69	4.52
10.2V	292.74	194.82	156.06	89.56	53.75	29.23	20.60	13.87	9.48	8.57	4.42
10.5V	284.07	189.21	151.98	87.21	52.58	28.92	20.30	13.67	9.44	8.45	4.36
10.8V	275.40	183.60	147.90	84.86	51.41	28.60	19.99	13.46	9.40	8.33	4.29

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.