



Ultimate Power for Changes

ECOTEK CANADA PROMOTION TRADE CORPORATION

REGISTERED ADDRESS:

1188 West Georgia Street, Unit 1440, Vancouver, B.C, Canada, V6E 4A2

Tel: +1 (778) 928-5580

Co. Reg. No.: BC0895460

www.ecotek-canada.vn

ORIGINAL

VALVE REGULATED LEAD ACID BATTERY



Our high quality VRLA batteries are developed with state-of-the-art technology.

- Absorbent Glass Mat (AGM) technology
- Long life
- Small size
- No leakage
- Low self discharge
- No water or electrolyte supplement is required
- Maintenance-free
- They have been widely used in UPS, and other kinds of back-up power.

ECT-UP12150VA18


12V150Ah
MAINTENANCE-FREE

Product





SẢN PHẨM KHÔNG CẦN BẢO DƯỠNG
ĐƯỢC BẢO HIỂM TRÁCH NHIỆM LÊN ĐẾN 2 TRIỆU USD

Dimensions(mm)

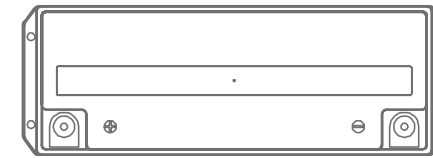

Length (L) : 483 (±3)
Width (W) : 170 (±3)
Height (H) : 240 (±3)
Overall Height : 240 (±3)



483±3

170±3



240±3

Specifications

Nominal Voltage(V)				12V
Nominal Capacity				
10 hour rate (15A to 10.80V)				150Ah
5 hour rate (25.5A to 10.20V)				127.5Ah
1 hour rate (90A to 9.60V)				90Ah
Weight				Approx. 45.5kg
Internal Resistance (at 1KHz)				Approx. 4.8mΩ
Maximum Discharge Current for 5 seconds:				1500A
Design life				10-12 years
Case Material				ABS UL94 HB
	Option: Flammability resistance of (UL94 V-0)			
Terminal				F18

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage **14.4 to 15.0V**

Coefficient -5.0mV/°C/cell

Maximum Charging Current **45A**

Standby use:

Float Charging Voltage **13.50 to 13.80V**

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge **-15°C(5°F) to 40°C(104°F)**

Discharge **-15°C(5°F) to 50°C(122°F)**





Storage **-15°C(5°F) to 40°C(104°F)**

Charge Retention (shelf life) at 20°C (68°F)

1 month **98%**

3 month **94%**

6 month **85%**

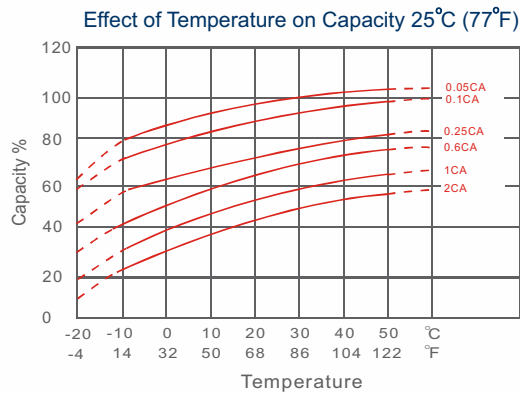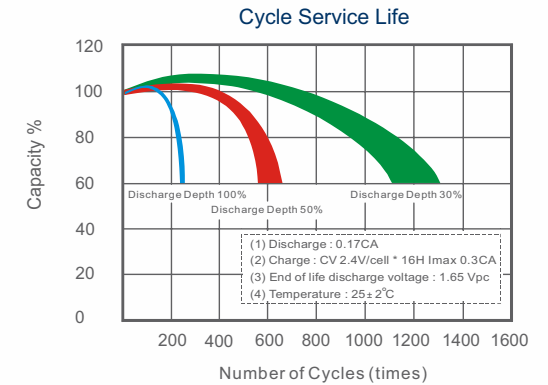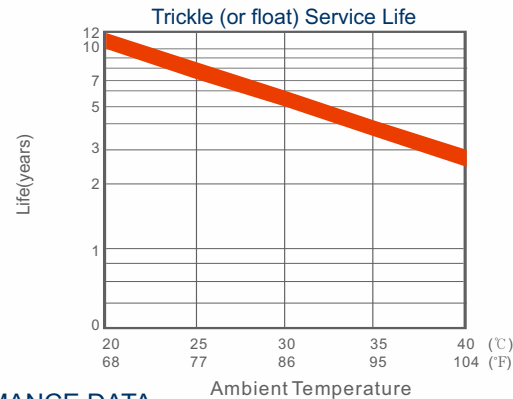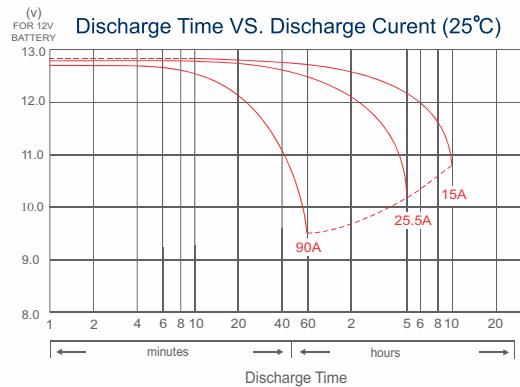

- PERFORMANCE DATA

- Discharge Rates in Watts to Variou End Voltages at 25°C (77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
10	min	405	461	517	544	573	587	598
15	min	359	401	440	459	478	489	500
20	min	322	354	383	397	411	419	431
30	min	257	276	293	301	309	313	324
60	min	161	167	170	172	174	176	183
90	min	132	139	141	142	143	143	145
120	min	106	112	113	114	115	115	117
180	min	75.0	78.5	79.7	80.5	80.9	81.1	81.9
240	min	58.7	61.3	62.2	62.8	63.1	63.3	63.9
300	min	48.3	50.4	51.1	51.6	51.9	52.0	52.5
480	min	32.9	34.1	34.6	35.0	35.2	35.3	35.5
600	min	29.3	30.3	30.7	31.0	31.2	31.2	31.5
1200	min	14.8	15.3	15.6	15.9	16.1	16.1	16.2


- Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
10	min	221	252	282	297	312	320	326
15	min	196	219	240	250	261	267	273
20	min	168	185	200	207	215	219	225
30	min	133	143	152	156	160	162	168
60	min	80.9	84.0	85.9	86.9	87.9	88.6	92.3
90	min	66.2	69.9	70.9	71.6	71.9	72.1	73.1
120	min	53.3	56.1	56.9	57.5	57.7	57.9	58.6
180	min	37.5	39.3	39.9	40.3	40.4	40.6	41.0
240	min	29.2	30.5	31.0	31.3	31.4	31.5	31.8
300	min	24.1	25.1	25.5	25.7	25.9	25.9	26.1
480	min	16.3	17.0	17.2	17.4	17.5	17.5	17.6
600	min	14.5	15.0	15.1	15.2	15.2	15.3	15.3
1200	min	7.30	7.52	7.56	7.60	7.64	7.68	7.70

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.

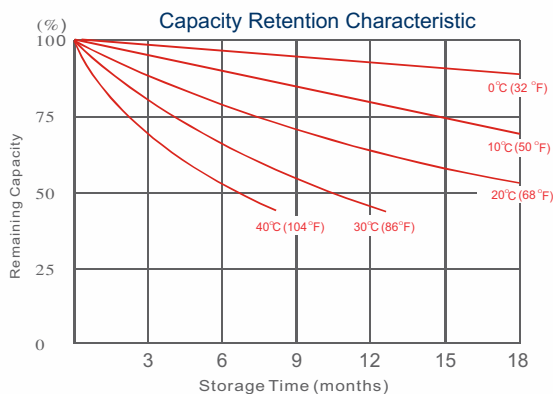

CÔNG TY NGUYỄN HÀ

AUTHORIZED MASTER DISTRIBUTOR IN VIET NAM

Address : 3/4 Nguyen Van Thu Street, Dakao Ward, District 1, HCM City

Tell : (028) 39.111.701 - Fax: (028) 39.111.700

Email : phanphoi@ecotek-canada.vn - dichvu@ecotek-canada.vn

Website : www.ecotek-canada.vn Call Center: 1800 1558

Factory has been assessed and certified as meeting the requirements of:

- * ISO 14001:2015 Certified by: SGS United Kingdom
- * OHSAS 18001 :2007 Certified by: SGS Taiwan
- * TL 9000-H:2016(R6)/R5.0 & ISO 9001:2015 Certified by: SGS-CSTC Standards Technical Services, China
- * ISO/IEC 17025 :2005 Certified by: Ministry Of Science and Technology Of Viet Nam

FACTORY ADDRESS:

Duc My Industrial Cluster, Duc Hoa Dong Commune, Duc Hoa District, Long An Province, Viet Nam

INVESTMENT LICENSE No: 1013126870

ISSUED BY: DEPARTMENT OF PLANNING AND INVESTMENT OF LONG AN PROVINCE