

VRLA AGM Battery

BT-12M26AT(W)[12V26Ah]



General Features

- Designed floating charging service life: 8 years (25°C)
- Sealed and maintenance free operation
- Safety valve installation for explosion proof
- Low self-discharge characteristic
- Wide operating temperature range from 0°C~50°C
- Lead Aluminum calcium Tin alloy high energy, prevent corrosion
- Case and cover available in both standard and flame retardant ABS




Application

- DC power supply
- UPS/EPS power supply
- Electrical devices & instruments
- Security and fire alarm systems
- Telecom stations and power stations
- Medical equipment
- Emergency lighting systems

Physical Specifications

Nominal Voltage	Nominal Capacity (20HR)	Dimension				Weight ±3%	Internal Resistance (In full charge status)	Standard Terminals
		L	W	H	TH			
12V	26AH	175±2mm	166±2mm	125±2mm	125±2mm	Approx 8.0kg (17.85lbs)	≤10.2mΩ	F13 (standard)

Dimensions

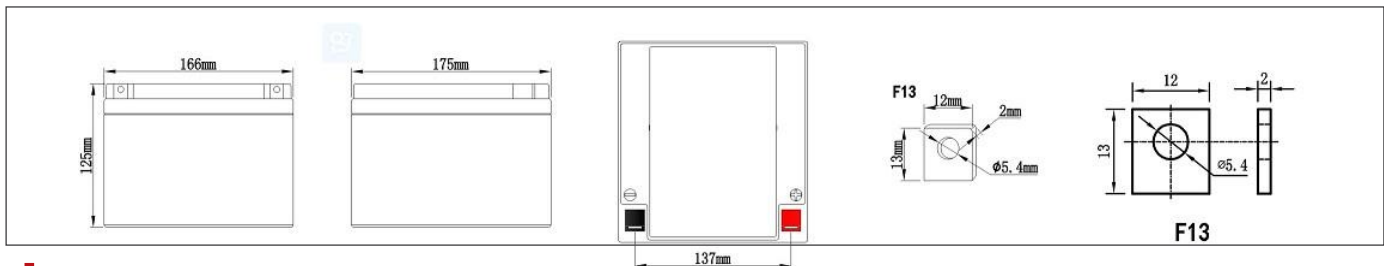

Constant-Voltage Charge

Rated Capacity	
20 hour rate (1.40A)	28.00AH
10 hour rate (2.60A)	26.00AH
5 hour rate (4.75A)	23.75AH
27 minute rate (28A)	13.50AH
7 minute rate (84A)	11.20AH
Capacity affected by Temperature	
40°C(104°F)	103%
25°C(77°F)	100%
0°C(32°F)	86%
Operating Temperature Range	
Discharge	-10~50°C
Charge	0~40°C
Storage	-10~50°C

Cycle Application

1. Limit initial current less than 7.0A.
2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77°F).
3. Hold at 14.1V to 14.4V until current drop to under 0.168A for at least 3 hours.
4. Temperature compensation coefficient of charging voltage is -30mV/°C.







Standby Service

1. Hold battery across constant voltage source of 13.6to 13.8 volts with current limit 7.0A continuously .
When held at this voltage , the battery will seek its own current level and maintain itself in a fully charge status.
2. Temperature compensation coefficient of charging voltage is -18mV/°C.

Battery Discharge Table

End Voltage (V)	Minute (M)					Hour (H)							
	5	10	15	30	45	1	1.5	2	3	5	8	10	20
Constant Current Discharge Data Sheet (Amperes at 25°C)													
10.20	103.9	67.6	53.0	27.1	19.6	16.9	13.41	9.97	7.52	4.81	3.22	2.73	1.45
10.50	103.0	67.1	52.5	26.8	19.4	16.7	13.17	9.59	7.28	4.74	3.20	2.71	1.43
10.80	102.0	66.3	52.0	26.5	19.1	16.6	12.92	9.22	7.04	4.64	3.16	2.60	1.40
Constant Power Discharge Data Sheet (Watt at 25°C)													
10.20	1126	812	657	371	271	206	157.9	118.8	84.78	55.88	39.36	31.85	17.15
10.50	1079	785	638	364	264	203	155.6	117.1	82.86	55.24	39.04	31.37	16.91
10.80	1023	756	617	353	258	199	153.3	115.4	81.43	54.60	38.64	30.85	16.67

Performance Characteristics

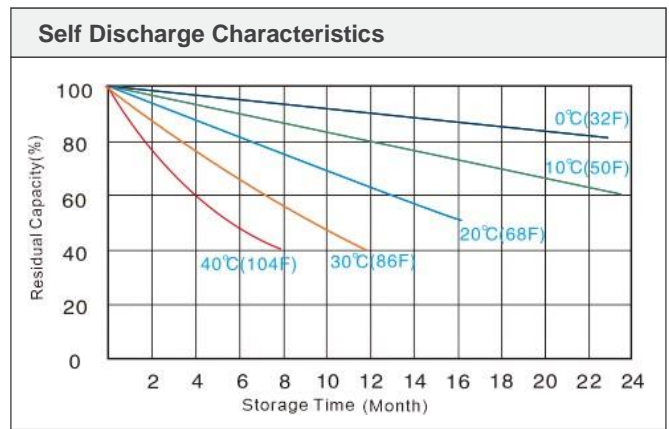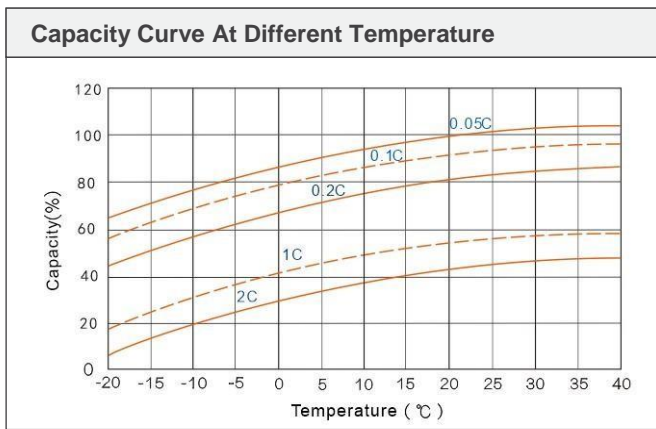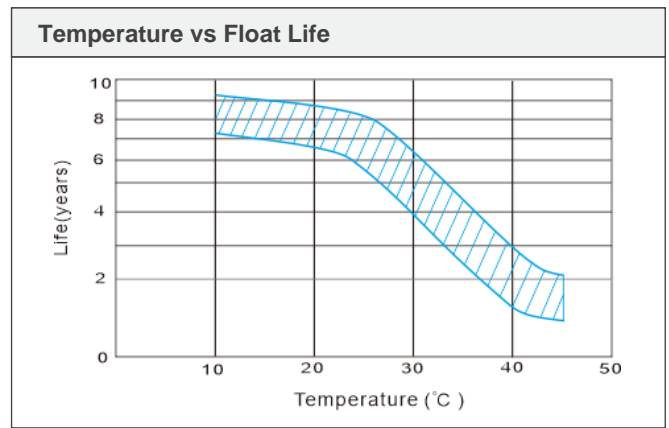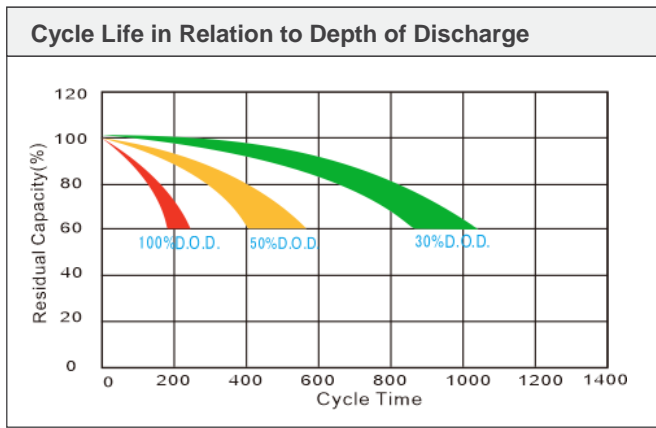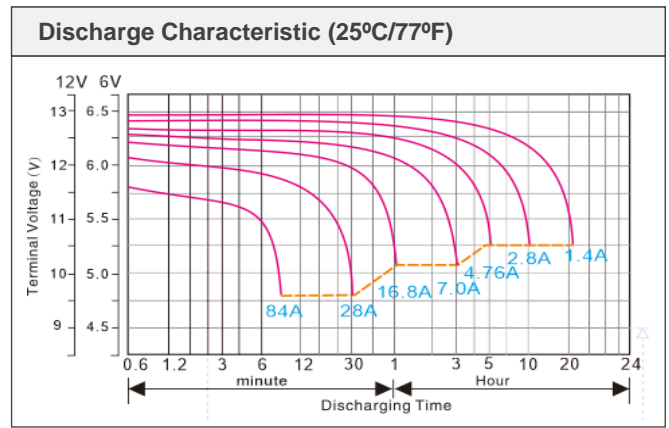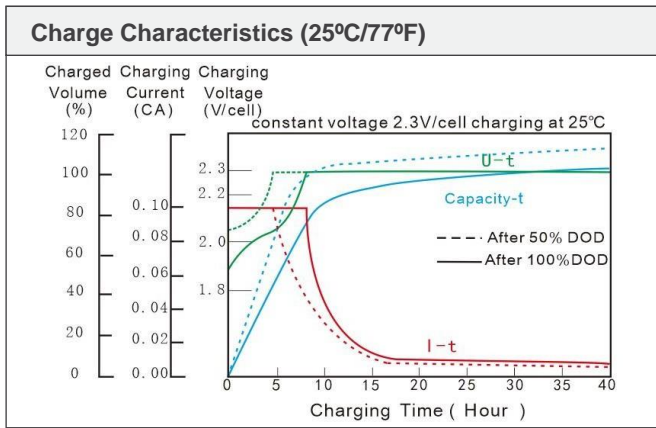

FACTORY ADDRESS:
 Road No.6, An Phuoc IP, An Phuoc Ward, Long Thanh District,
 Dong Nai Province, Vietnam

☎ 0084-978366669
 📠 0084-2513686918

✉ sales@saite.vn
 🌐 www.saite.vn